

B

C

E

公差表



REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-29	李国常

**SPECIFICATIONS**


- Voltage rating: 100V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 10MΩ max

**HOUSING**

- Part No: H2001-NP
- Poles: 02-20
- Material: Nylon 66 UL94V-0

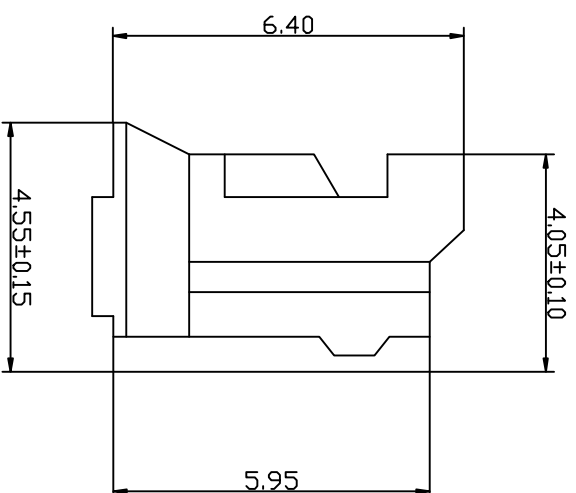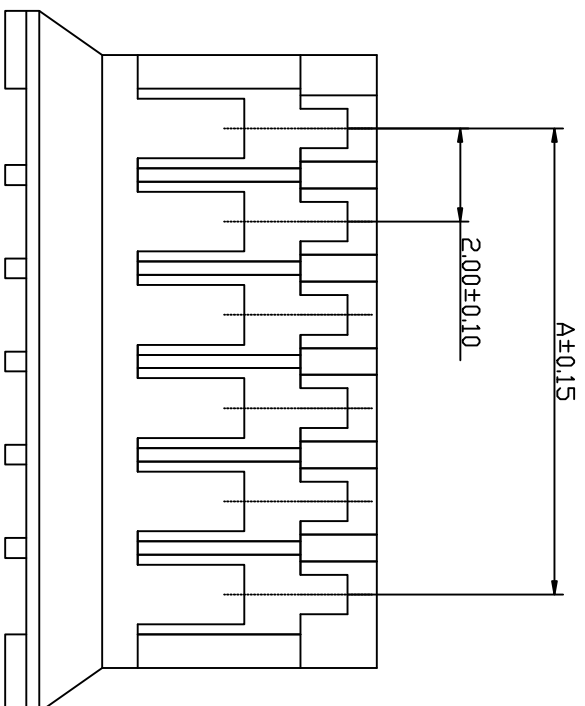

Part No	Dimensions (mm)	
	A	B
H2001-02	2.00	5.80
H2001-03	4.00	7.80
H2001-04	6.00	9.80
H2001-05	8.00	11.80
H2001-06	10.00	13.80
H2001-07	12.00	15.80
H2001-08	14.00	17.80
H2001-09	16.00	19.80
H2001-10	18.00	21.80
H2001-11	20.00	23.80
H2001-12	22.00	25.80
H2001-13	24.00	27.80
H2001-14	26.00	29.80
H2001-15	28.00	31.80
H2001-16	30.00	33.80
H2001-17	32.00	35.80
H2001-18	34.00	37.80
H2001-19	36.00	39.80
H2001-20	38.00	41.80

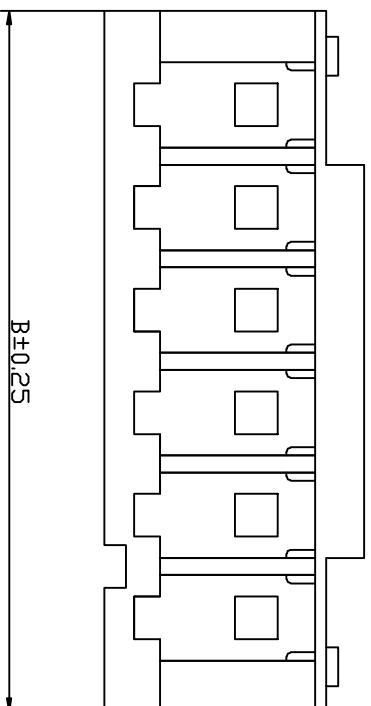

**KLT** 深圳市康利通电子科技有限公司

Tolerance

0±0.30

.0±0.25

.00±0.20

.000±0.015

VER No SIZE

A A4

B±0.25

4

4

B

C


D


E

F

1

TITILE		成品规格图		Tolerance	
CHECKED BY	DATE	SCALE	VER No	SIZE	
DRAWN BY	UNIT:mm	1:1	A	A4	
李国常	2016-04-29			H2001-NP	

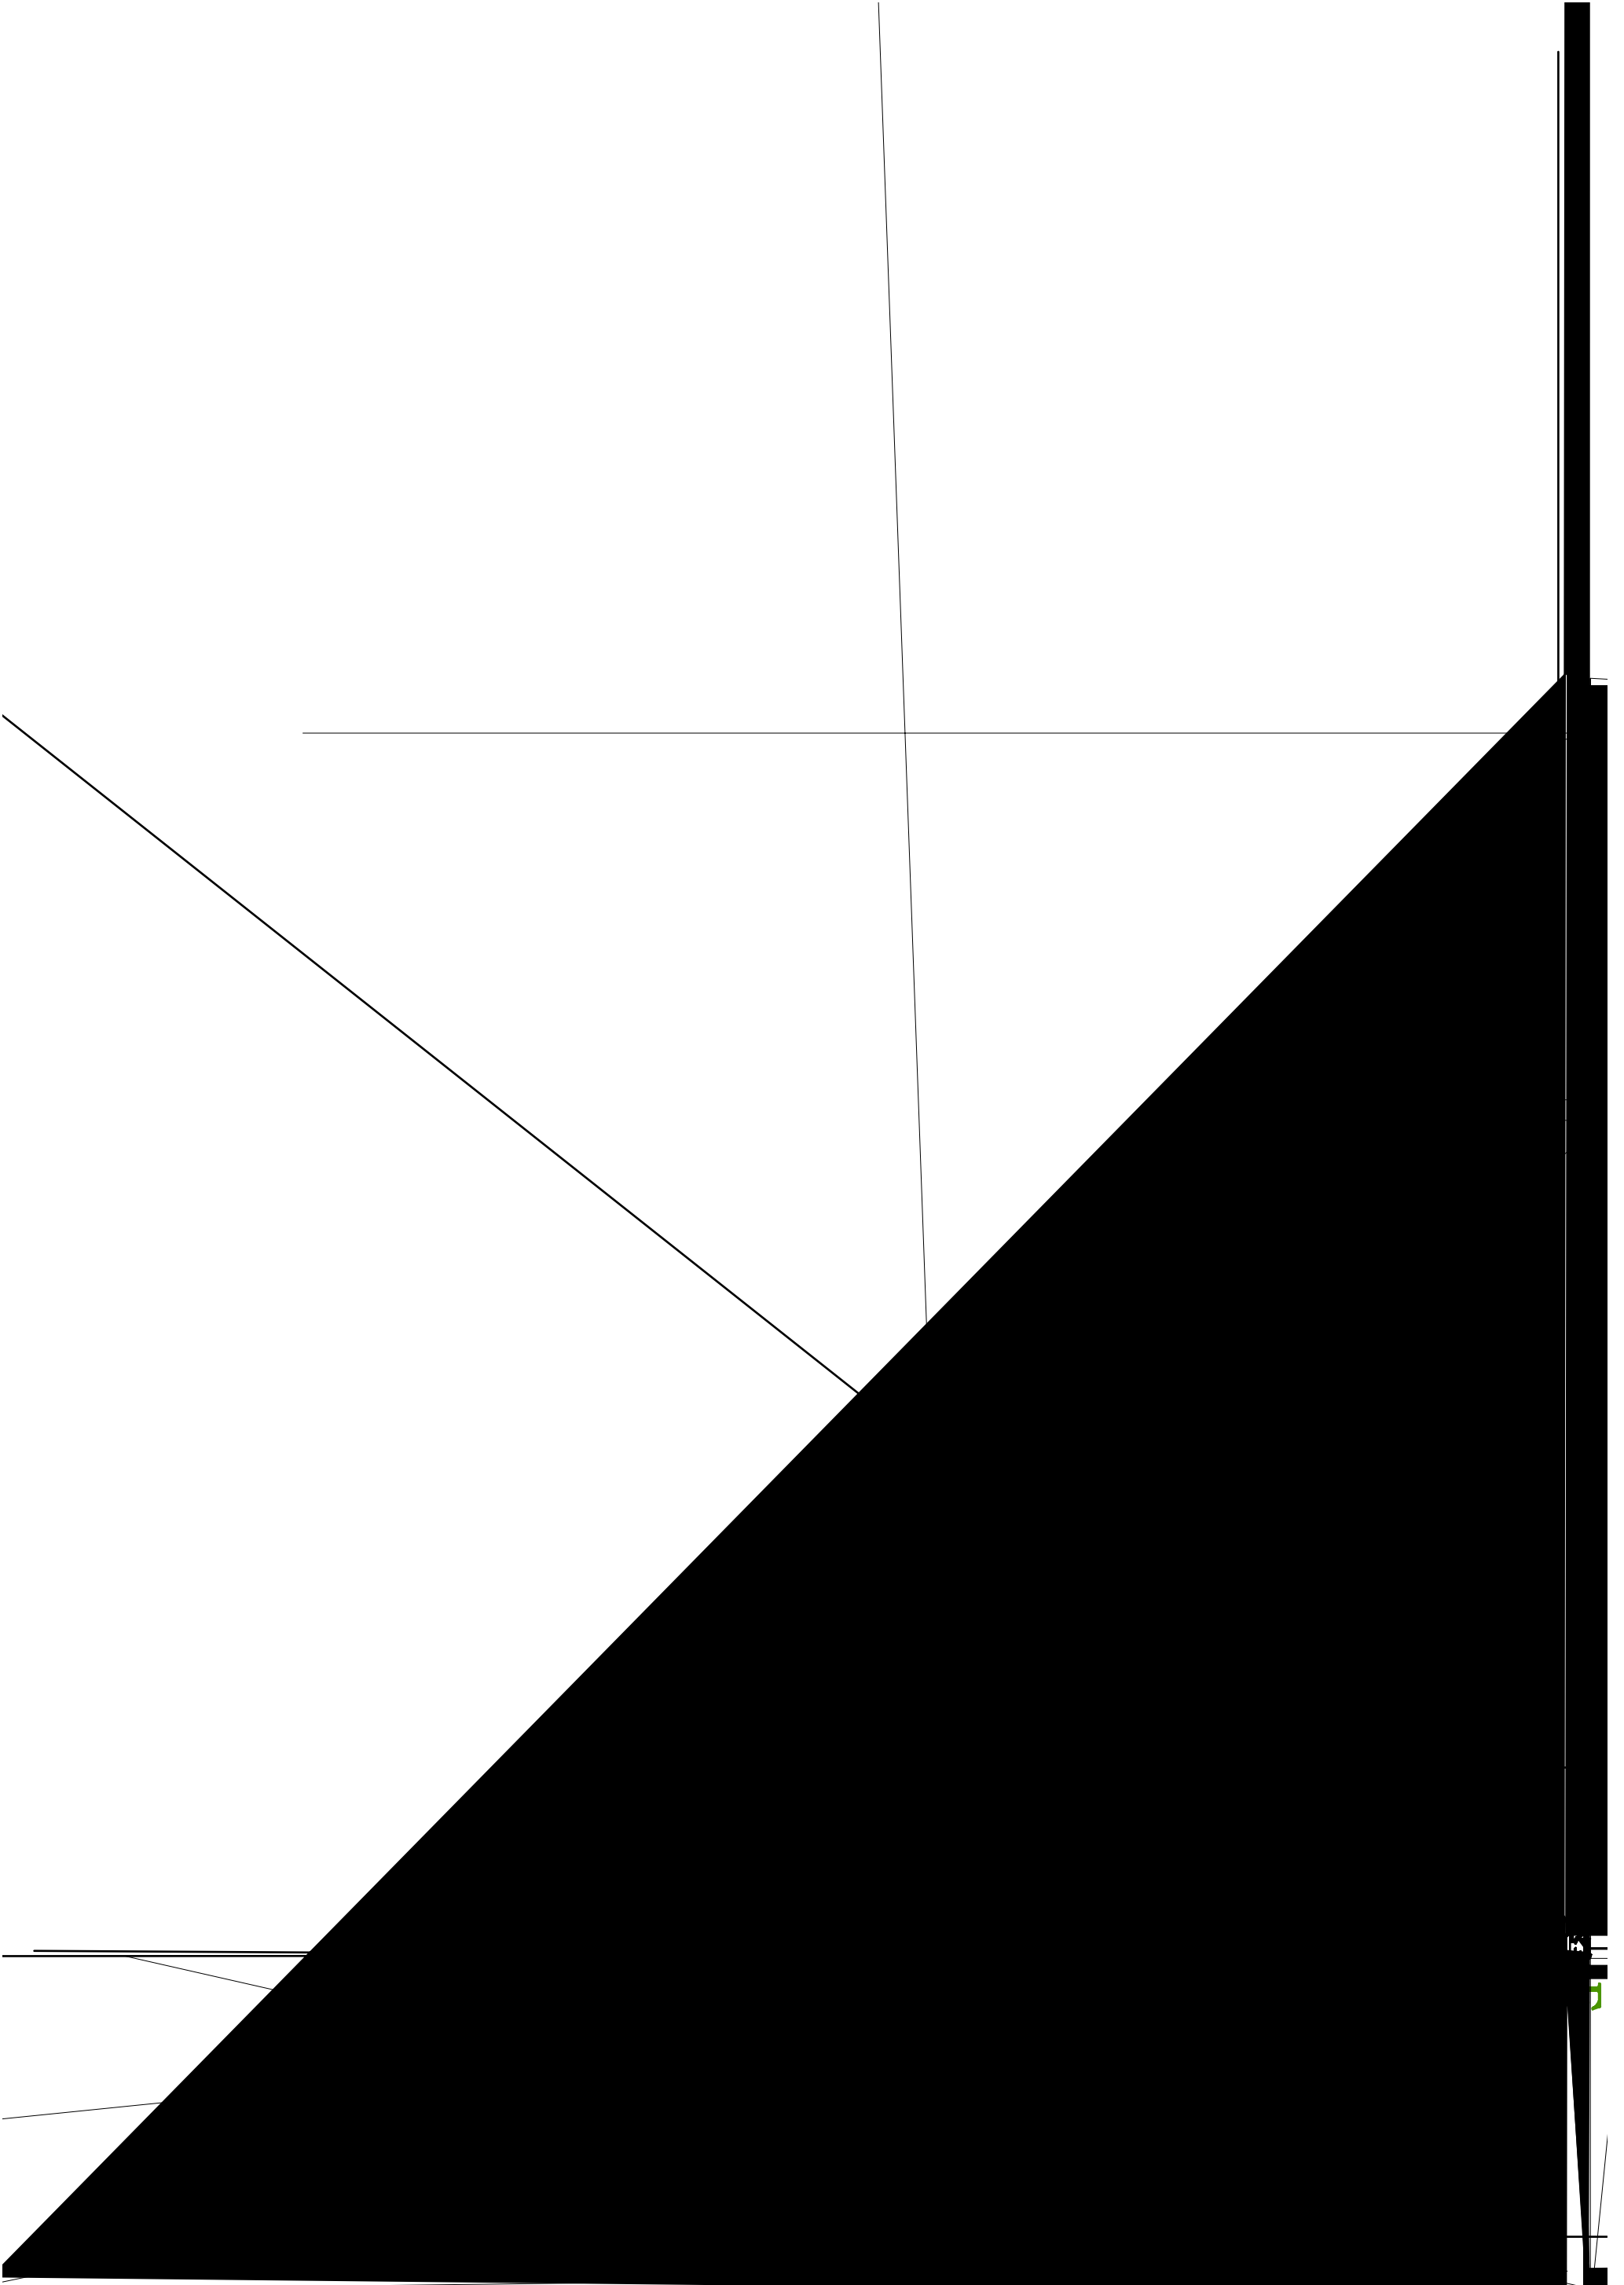

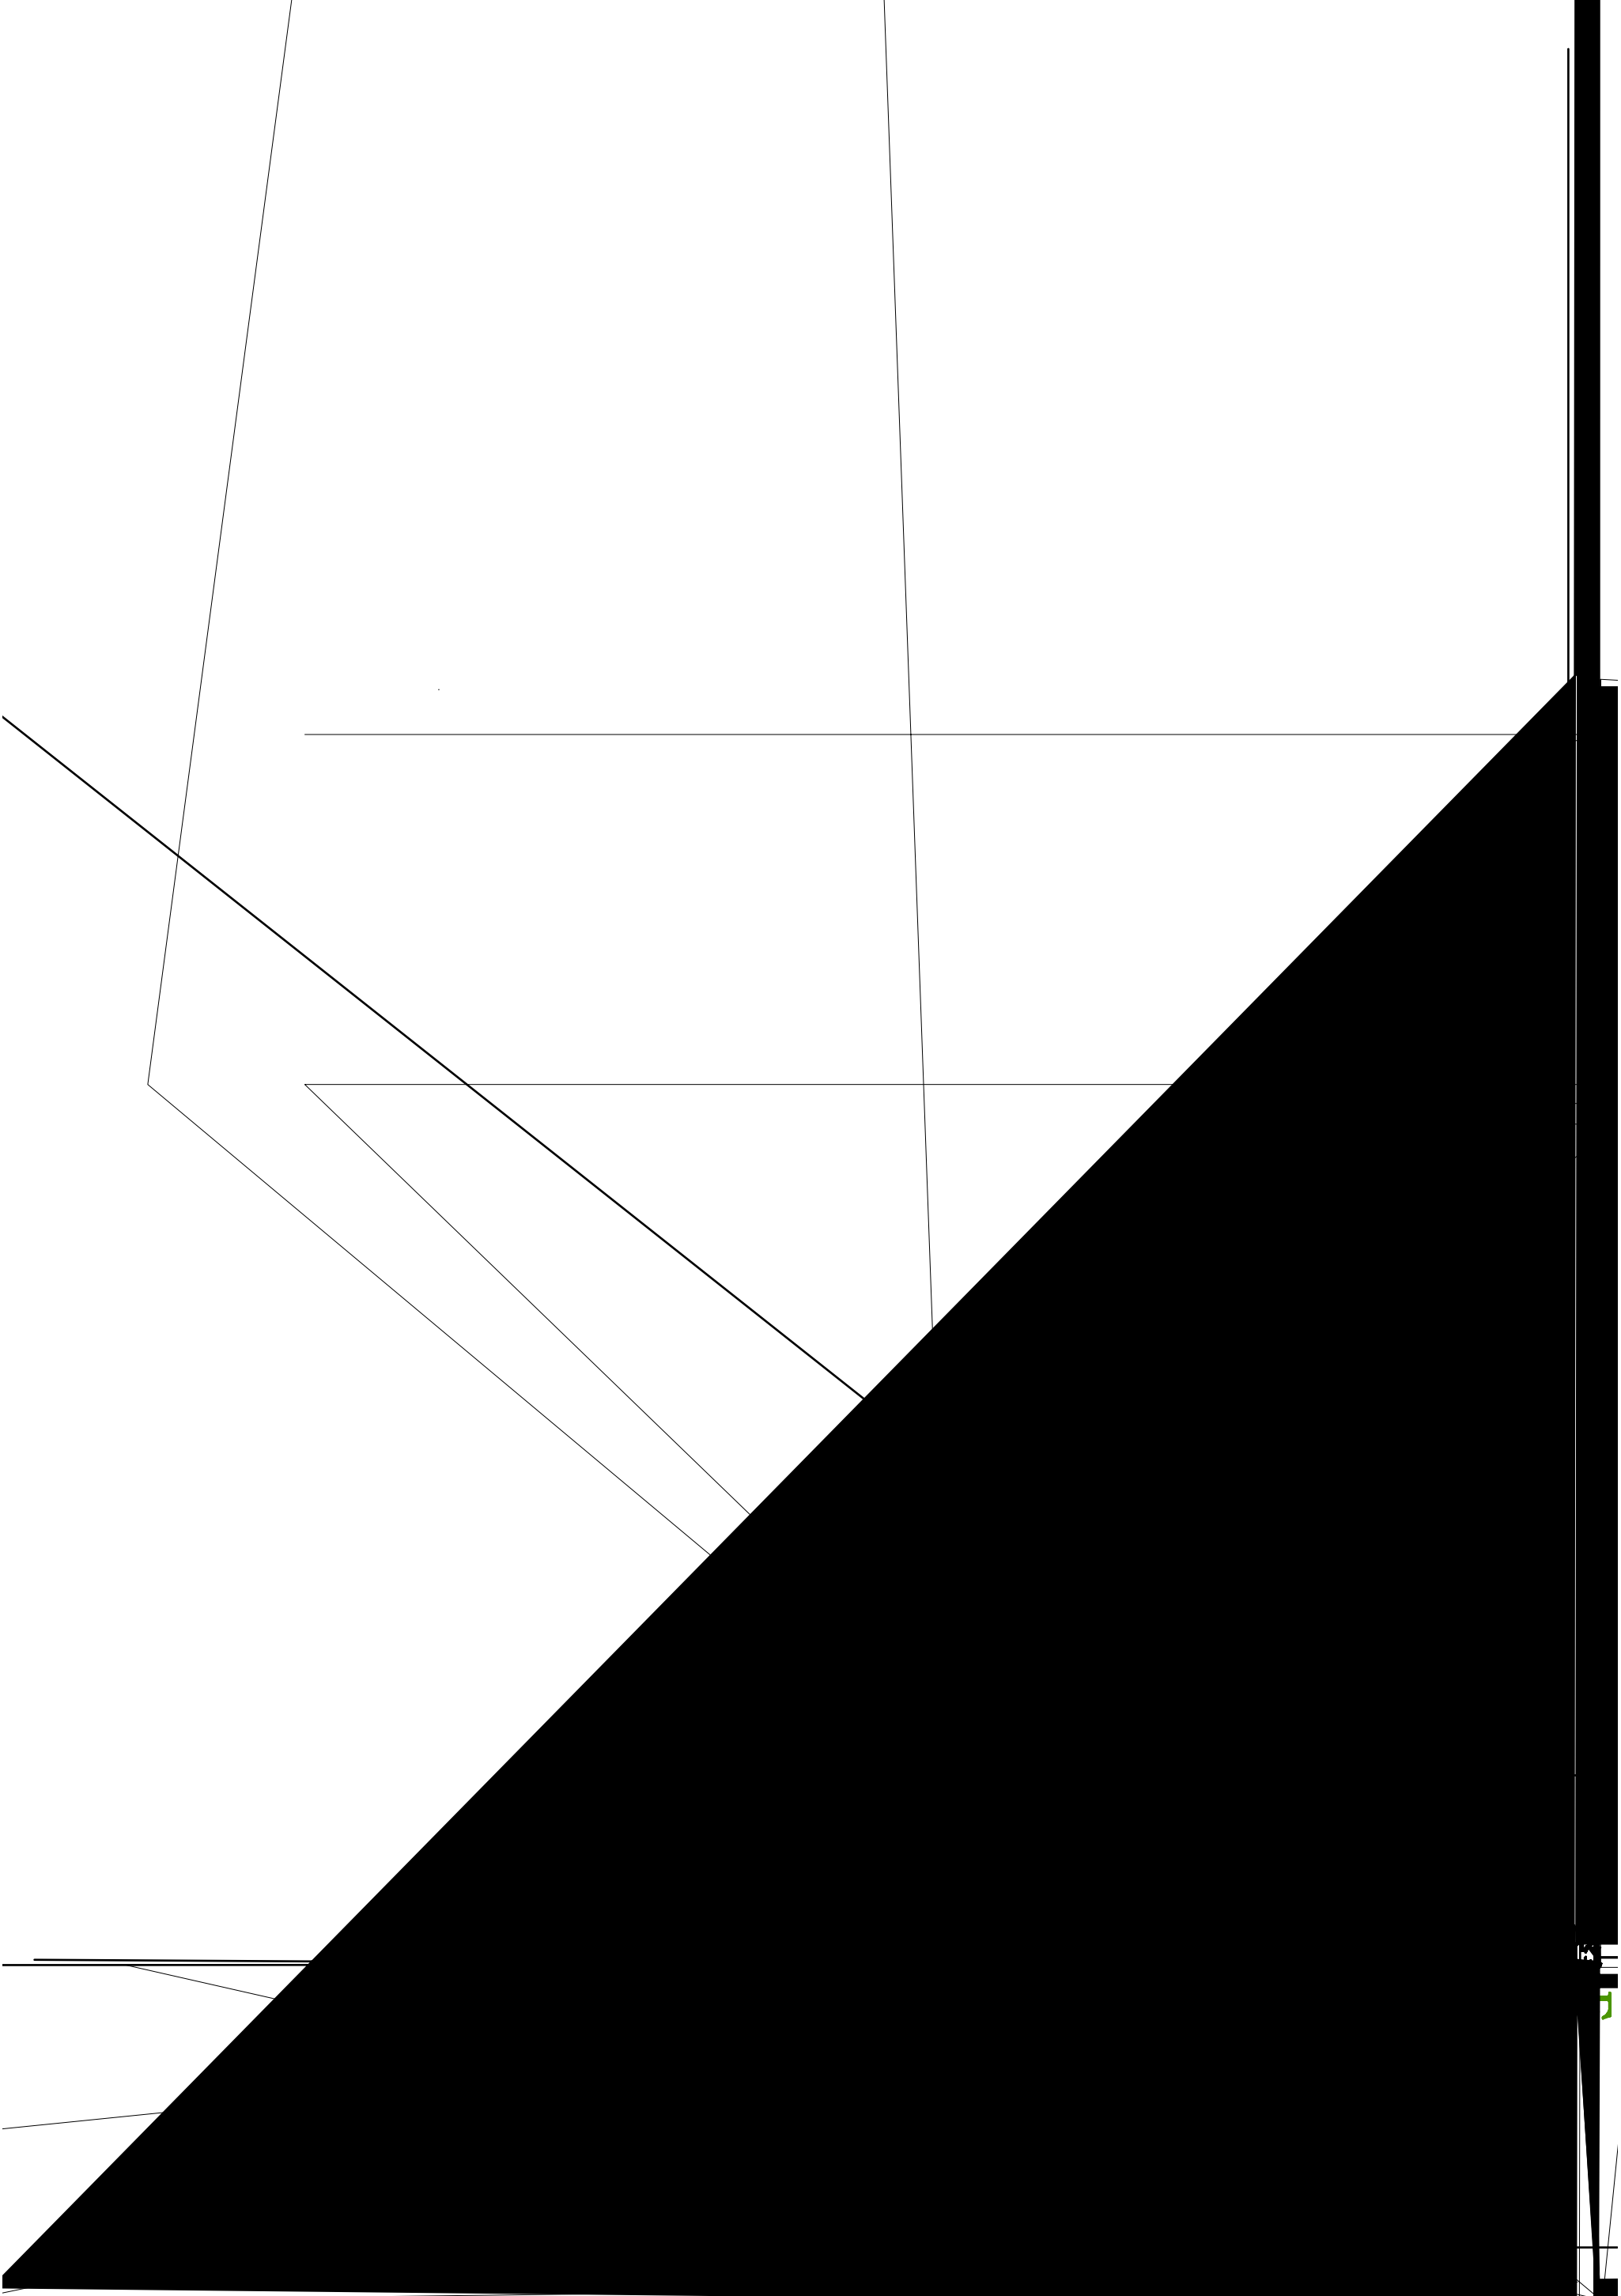

4

D

C

F

E

B

C

E





公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-29	李国常

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
  - Current rating: 2A, AC, DC
  - Withstanding Voltage: 800V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -40°C~+85°C
  - Contact resistance: 10MΩ max
- WAFER
- Part No: W2001RB-NP
  - Poles: 02-20
  - Material: Nylon 66 UL94V-2
  - Ter Material: Brass /Tin-plated


4

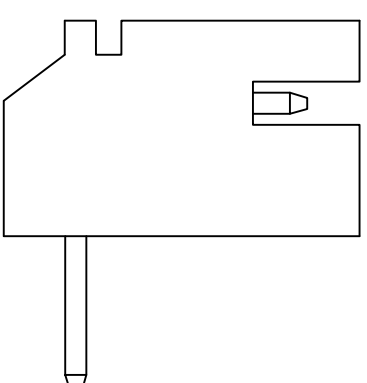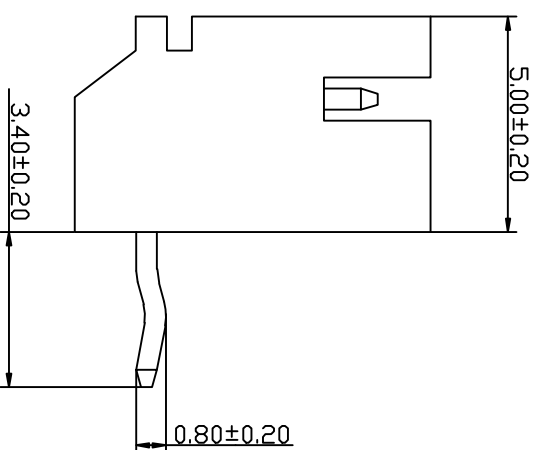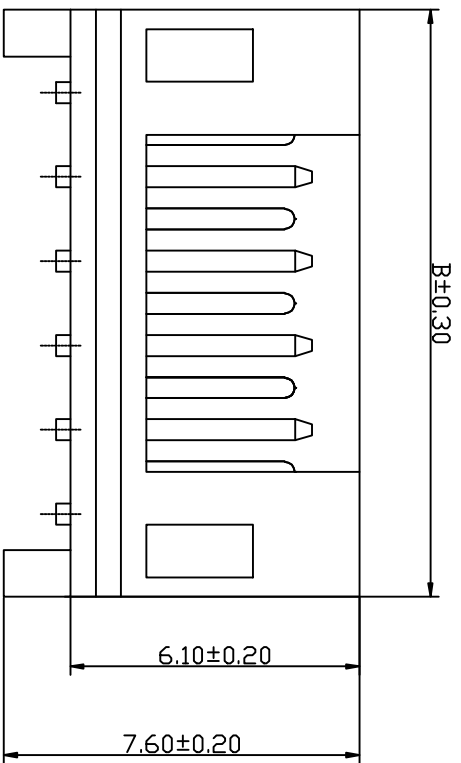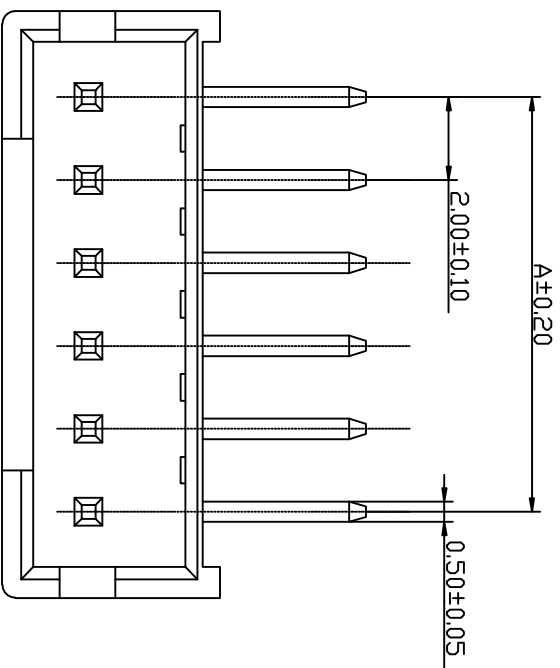

TYPE 2

TYPE 1

Part No	Dimensions (mm)	
	A	B
W2001RB-02	2.00	6.00
W2001RB-03	4.00	8.00
W2001RB-04	6.00	10.00
W2001RB-05	8.00	12.00
W2001RB-06	10.00	14.00
W2001RB-07	12.00	16.00
W2001RB-08	14.00	18.00
W2001RB-09	16.00	20.00
W2001RB-10	18.00	22.00
W2001RB-11	20.00	24.00
W2001RB-12	22.00	26.00
W2001RB-13	24.00	28.00
W2001RB-14	26.00	30.00
W2001RB-15	28.00	32.00
W2001RB-16	30.00	34.00
W2001RB-17	32.00	36.00
W2001RB-18	34.00	38.00
W2001RB-19	36.00	40.00
W2001RB-20	38.00	42.00

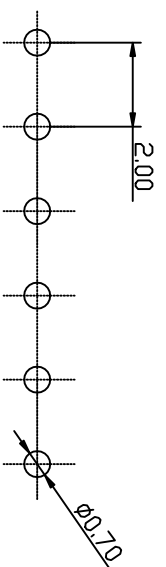

P.C.B LAYOUT

**KLT** 深圳市康利通电子科技有限公司

成品规格图

TOCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		SCALE		VER No		SIZE	
CHECKED BY	DATE	2016-04-29	SCALE	1:1	VER No	SIZE		
DRAWN BY	UNIT:mm				A	A4		
李国常	PART No	W2001RB-NP						

B

C

▽

D

E

F

4

1