

B


C

E



公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-23	李国常


4

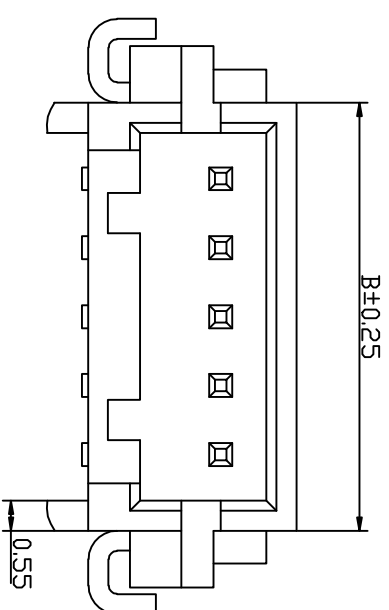

4

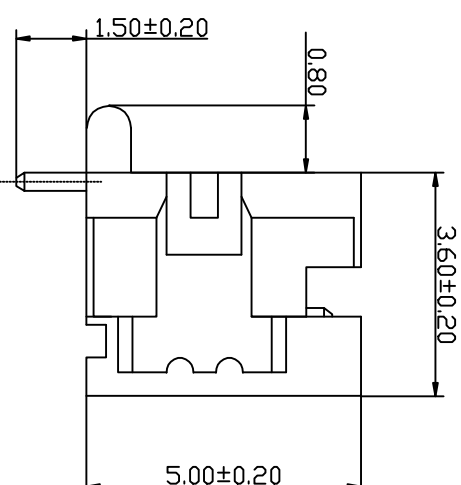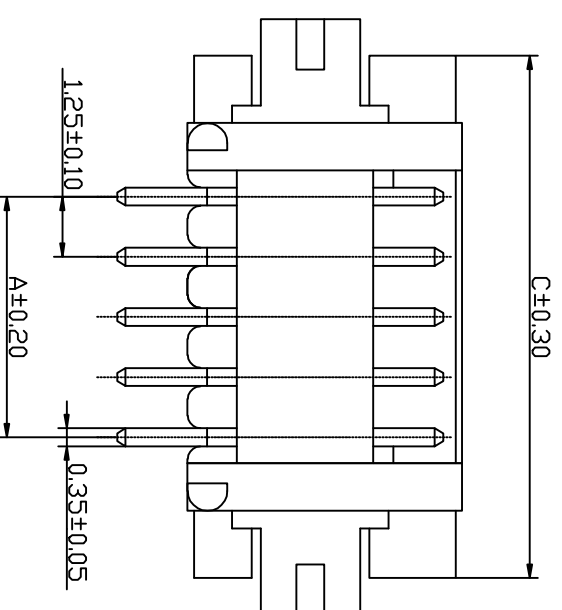

Part No	Dimensions (mm)		
	A	B	C
W1252SR-02	1.25	4.15	6.25
W1252SR-03	2.50	5.40	7.50
W1252SR-04	3.75	6.65	8.75
W1252SR-05	5.00	7.90	10.00
W1252SR-06	6.25	9.15	11.25
W1252SR-07	7.50	10.40	12.50
W1252SR-08	8.75	11.65	13.75
W1252SR-09	10.00	12.90	15.00
W1252SR-10	11.25	14.15	16.25
W1252SR-11	12.50	15.40	17.50
W1252SR-12	13.75	16.65	18.75
W1252SR-13	15.00	17.90	20.00
W1252SR-14	16.25	19.15	21.25
W1252SR-15	17.50	20.40	22.50

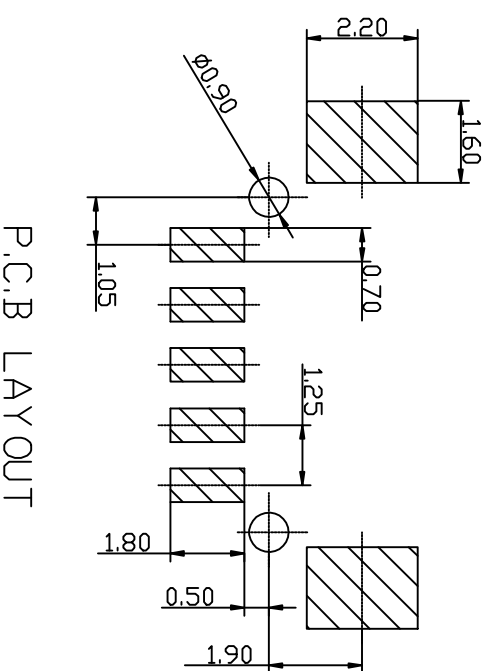

P.C.B LAYOUT

**KLT** 深圳市康利通电子科技有限公司

TO CERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

VER No SIZE

A A4

TITLE	成品规格图		TO CERANCE	
CHECKED BY	DATE	SCALE	VER No	SIZE
DRAWN BY	UNIT:mm		A	A4
PART No	W1252SR-NP			

李国常

2016-04-23

1:1

W1252SR-NP

B

C

D

E

F

1

B

C

E

公差表


REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-23	李国常

**SPECIFICATIONS**

- Voltage rating: 150V AC, DC
  - Current rating: 1A, AC, DC
  - Withstanding Voltage: 500V AC/minute
  - Insulation resistance: 500MΩ min
  - Temperature range: -40℃~+85℃
  - Contact resistance: 30MΩ max
- WAFER
- Part No: W1252SV-2\*NP
  - Poles: 10, 14, 20, 30, 40
  - Material: Nylon 6T UL94V-0
  - Cap: Nylon 6T UL94V-0
  - Ter Material: Brass /Tin-plated

4

4

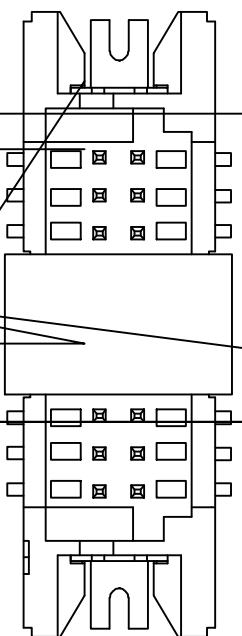

Part No	Dimensions (mm)	
	A	B
H1252SV-2*05	5.00	12.50
H1252SV-2*07	7.50	15.00
H1252SV-2*10	11.25	18.75
H1252SV-2*15	17.50	25.00
H1252SV-2*20	23.75	31.25

深圳市康利通电子科技有限公司

TITLE

成品规格图

CHECKED BY

DATE

SCALE

.00±0.20  
.000±0.015

DRAWN BY

2016-04-23

1:1

VER No  
SIZE

李国常

UNIT:mm



A  
A4

PART No

W1252SV-2\*NP

P.C.B LAYOUT


B

C

D

E

F

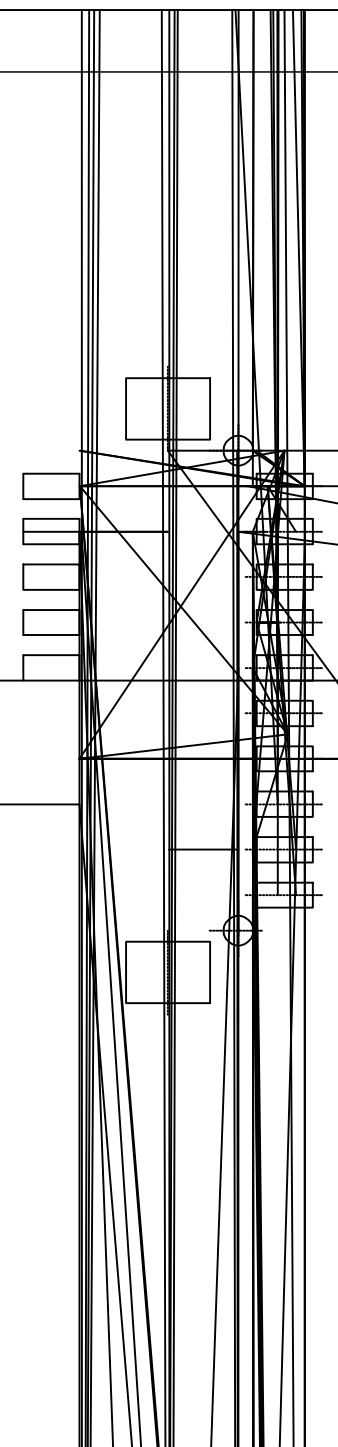


1

B

C

4

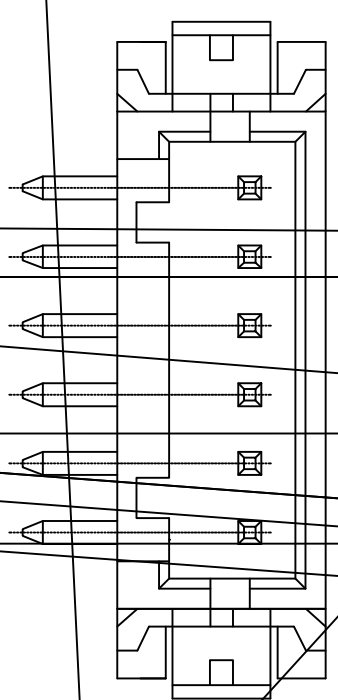

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-23	李国常

■ SPECIFICATIONS

- Voltage rating: 125V AC, DC
  - Current rating: 1A, AC, DC
  - Withstanding Voltage: 500V AC/minute
  - Insulation resistance: 100MΩ min
  - Temperature range: -40℃~+85℃
  - Contact resistance: 10MΩ max
- WAFER
- Part No: W1252SV-NP
  - Poles: 02-15
  - Material: Nylon 6T UL94V-0
  - Ter Material: Brass /TiN-plated

Part No	Dimensions (mm)		
	A	B	C
W1252SV-02	1.25	4.15	6.25
W1252SV-03	2.50	5.40	7.50
W1252SV-04	3.75	6.65	8.75
W1252SV-05	5.00	7.90	10.00
W1252SV-06	6.25	9.15	11.25
W1252SV-07	7.50	10.40	12.50
W1252SV-08	8.75	11.65	13.75
W1252SV-09	10.00	12.90	15.00
W1252SV-10	11.25	14.15	16.25
W1252SV-11	12.50	15.40	17.50
W1252SV-12	13.75	16.65	18.75
W1252SV-13	15.00	17.90	20.00
W1252SV-14	16.25	19.15	21.25
W1252SV-15	17.50	20.40	22.50

**KLT** 深圳市康利通电子科技有限公司

成品规格图

TOLERANCE

TITLE	成品规格图		TOLERANCE	
CHECKED BY	DATE	SCALE	0±0.30	
DRAWN BY	UNIT:mm	VER No	.0±0.25	
PART NO	W1252SV-NP	SIZE	.00±0.20	
			.000±0.015	

B

C

D

E

F

1

4

B

C

D

E

李国常

PARK

DIRT

F