

B




C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-06	李国常


4

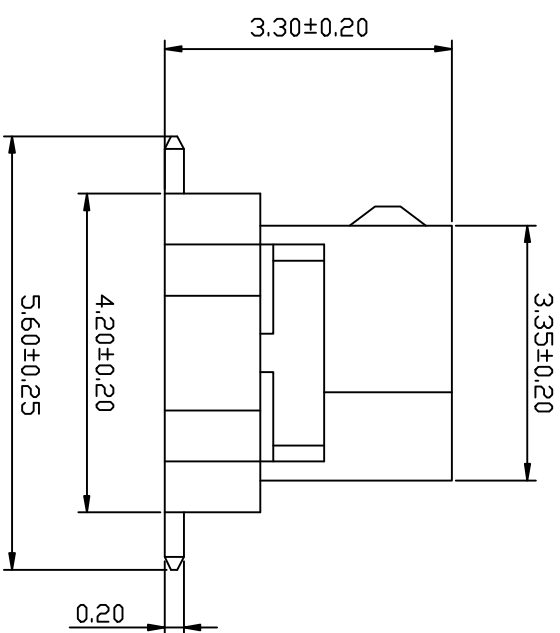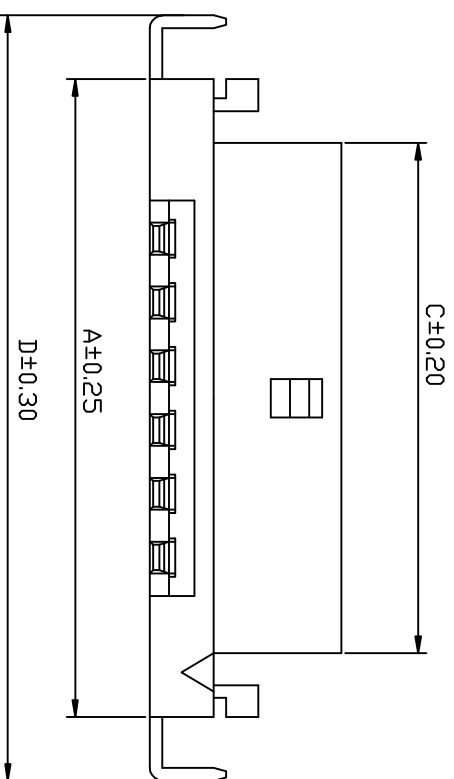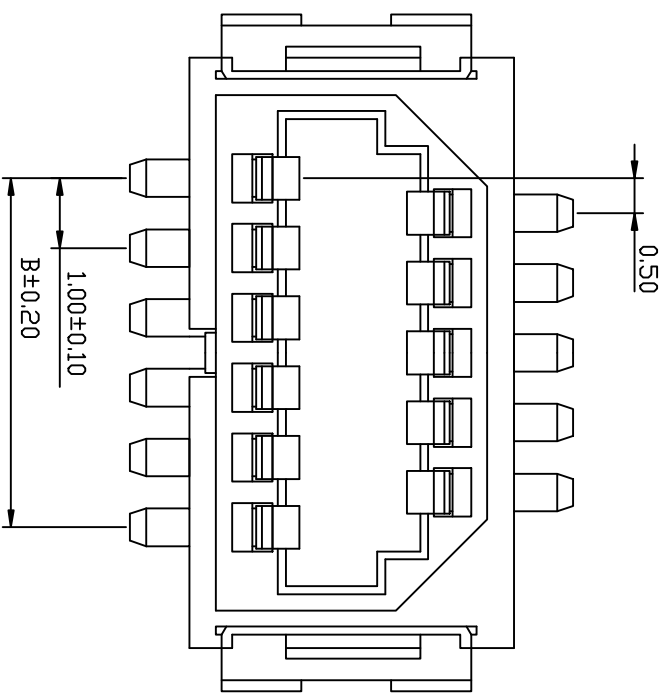

- SPECIFICATIONS**
- Voltage rating: 150V AC, DC
 - Current rating: 0.5A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 500MΩ min
 - Temperature range: -40°C~+85°C
 - Contact resistance: 20MΩ max

- WAFER**
- Part No: W1002SV-NP
 - Poles: 09-51
 - Material: Nylon 6T UL94V-0
 - Ter Material: Brass /Tin-plated

Part No	Dimensions (mm)			
	A	B	C	D
W1002SV-09	8.30	4.00	6.55	10.10
W1002SV-11	9.30	5.00	7.55	11.10
W1002SV-13	10.30	6.00	8.55	12.10
W1002SV-15	11.30	7.00	9.55	13.10
W1002SV-17	12.30	8.00	10.55	14.10
W1002SV-19	13.30	9.00	11.55	15.10
W1002SV-21	14.30	10.00	12.55	16.10
W1002SV-23	15.30	11.00	13.55	17.10
W1002SV-25	16.30	12.00	14.55	18.10
W1002SV-31	19.30	15.00	17.55	21.10
W1002SV-41	24.30	20.00	22.55	26.10
W1002SV-51	29.30	25.00	27.55	31.10

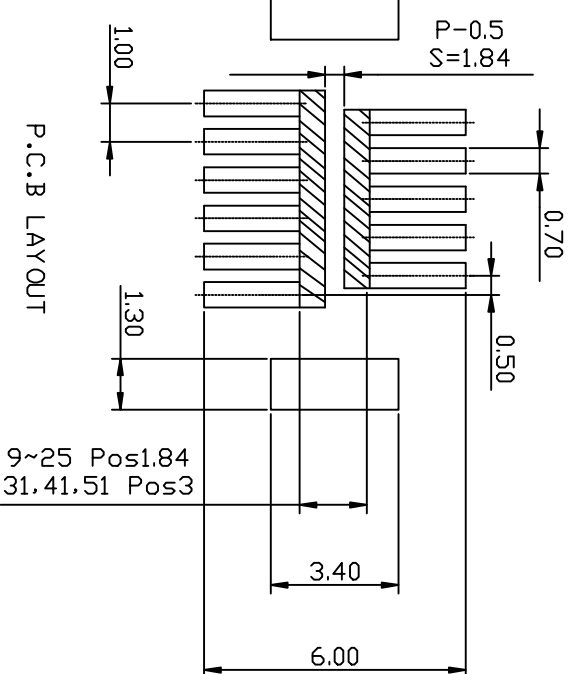

KLT 深圳市康利通电子科技有限公司

成品规格图

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

VER No SIZE

A A4

TITLE	成品规格图		TOLERANCE	
CHECKED BY	DATE	SCALE	VER No	SIZE
DRAWN BY	UNIT:mm	1:1	A	A4
李国常	2016-04-06			
PART NO	W1002SV-NP			

B

C

D

E

F

1

4

B

C

E

公差表


REV	ECN	NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A				新版本	2016-04-06	李国常

4

4

- SPECIFICATIONS
- Voltage rating: 150V AC, DC
 - Current rating: 0.5A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 500MΩ min
 - Temperature range: -40℃~+85℃
 - Contact resistance: 20MΩ max

- WAFER
- Part No: W1002SV-NP-1
 - Poles: 09-51

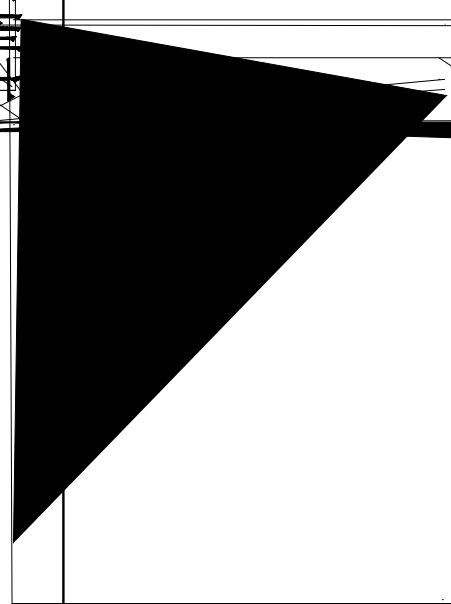

KLEST
深圳

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	CHECKED BY	DATE	SCALE	VER No	SIZE
成品规格图		2016-04-06	1:1		
DRAWN BY	李国常				
UNIT:mm				A	A4
PART No					W1002SV-NP-1

1

B

C

D

E

F

B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-06	李国常

SPECIFICATIONS


- Voltage rating: 150V AC, DC
- Current rating: 0.5A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -40°C~+85°C
- Contact resistance: 20MΩ max

WAFER

- Part No: W1002SV-NP-2
- Poles: 09-51

4

4



深圳市康利通电子科技有限公司

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

NO. SIZE

A4

成品规格图

TITLE

CHECKED BY

DATE

SCA

2016-04-06

1:

DRAWN BY

UNIT:mm

李国常

PART NO

W

B

C

D

E

1