

B






C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-15	李国常

4

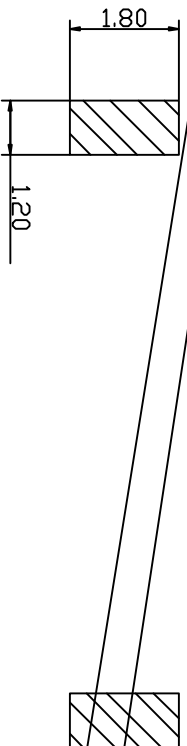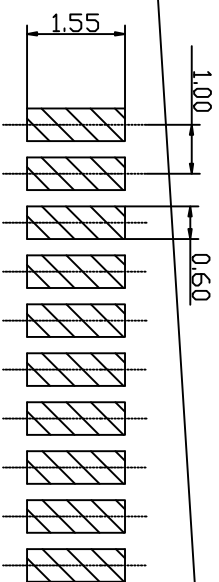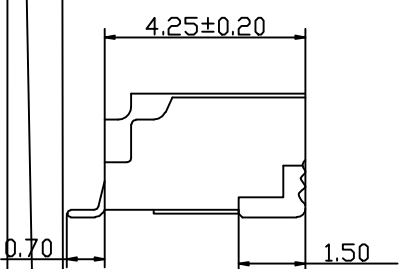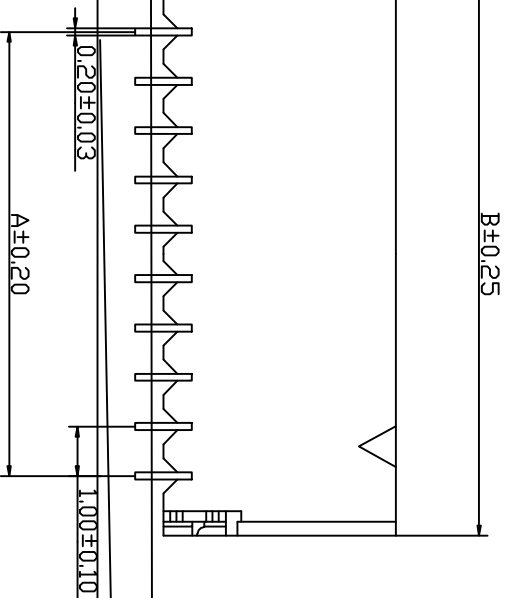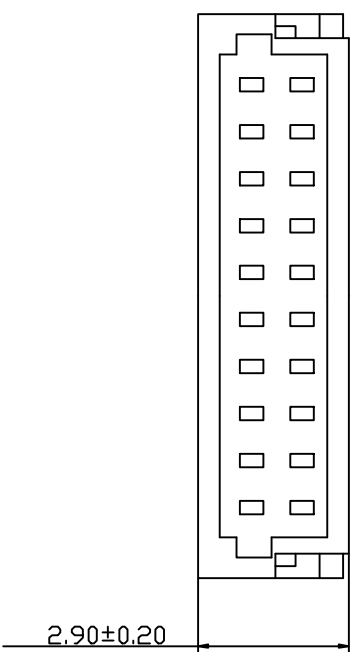

P.C.B LAYOUT

Part No	Dimensions (mm)	
	A	B
W1001SR-02	1.00	5.00
W1001SR-03	2.00	6.00
W1001SR-04	3.00	7.00
W1001SR-05	4.00	8.00
W1001SR-06	5.00	9.00
W1001SR-07	6.00	10.00
W1001SR-08	7.00	11.00
W1001SR-09	8.00	12.00
	9.00	13.00
	10.00	14.00
	11.00	15.00
	12.00	16.00
	13.00	17.00
	14.00	18.00
W1001SR-10	15.00	19.00
W1001SR-11	16.00	20.00
W1001SR-12	17.00	21.00
W1001SR-13	18.00	22.00
W1001SR-14	19.00	23.00
W1001SR-15	20.00	
W1001SR-16	21.00	
W1001SR-17	22.00	
W1001SR-18	23.00	

- SPECIFICATIONS**
- Voltage rating: 50V AC, DC
  - Current rating: 1A, AC, DC
  - Withstanding Voltage: 500V AC/minute
  - Insulation resistance: 100MΩ min
  - Temperature range: -40°C~+85°C
  - Contact resistance: 20MΩ max
- WAFER
- Part No: W1001SR-NP
  - Poles: 02-24
  - Material: Nylon 6T UL94V-0
  - Ter Material: Phosphor Bronze /Tin-plated

**KLIT** 深圳市康利通电子科技有限公司

成品规格图

TOCCERANCE

0±0.30

±0±0.25

.00±0.20

.000±0.015

VER No SIZE

A A4

TITLE	DATE	SCALE	VER No	SIZE
CHECKED BY	2016-04-15	1:1		
DRAWN BY	UNIT:mm			
PART No	W1001SR-NP			

李国常

B

C

D

E

F

1

4

